

Data sheet

COOK




Technical data

Heating power range	[kW]	3 - 6
Nominal heat output	[kW]	6
Fresh air demand	[m³/h]	16
Room heating capacity (depending on house insulation)	[m³]	70 - 160
Fuel consumption	[kg/h]	0,9 - 1,7
Efficiency	[%]	84
Energy efficiency class		A+
Chimney draft requirement	[Pa]	12

Characteristics



Ceramic hob



Balanced flue




RLS system




Energy efficiency

Accessories



Fresh air floor connection

Dimensions, weight and connection

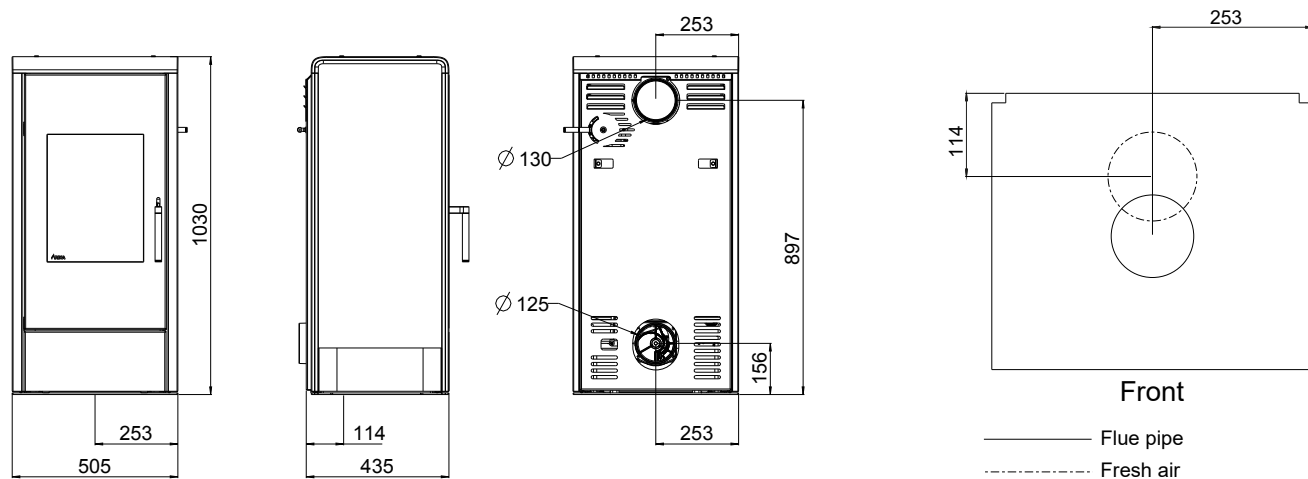

Dimensions

Height	[mm]	1030
Width	[mm]	505
Corpus depth	[mm]	435
Firing chamber [WxHxD]	[mm]	340x300x350

Weight

Weight with steelpanel or ceramic decor	[kg]	~135
---	------	------

Flue pipe connection

Flue pipe outlet	[mm]	130
Original angle pipe connection height	[mm]	-
Original angle pipe total depth	[mm]	-
Original angle pipe distance to rear wall	[mm]	-
Depth from rear wall to middle of flue pipe	[mm]	-
Original angle pipe side distance	[mm]	-
Rear connection height	[mm]	897
Rear connection side distance	[mm]	253

Fresh air connection

Diameter	[mm]	125
Connection height	[mm]	156
Side distance	[mm]	253
Floor connection side distance	[mm]	253
Floor connection depth	[mm]	114

Safety distances

Note

- To non-combustible objects
a > 40 cm b > 10 cm
- To combustible objects and reinforced concrete load-bearing walls
a > 80 cm b > 10 cm

