

Data sheet


LOOK RLU



Technical data

Nominal heat output	[kW]	8
Partial heat output	[kW]	4
Fresh air demand	[m³/h]	21
Room heating capacity (depending on house insulation)	[m³]	90 - 210
Fuel consumption	[kg/h]	1,1 - 2,2
Efficiency	[%]	81,3
Energy efficiency class		A+
Chimney draft requirement	[Pa]	12


Characteristics



Balanced flue



Energy
efficiency

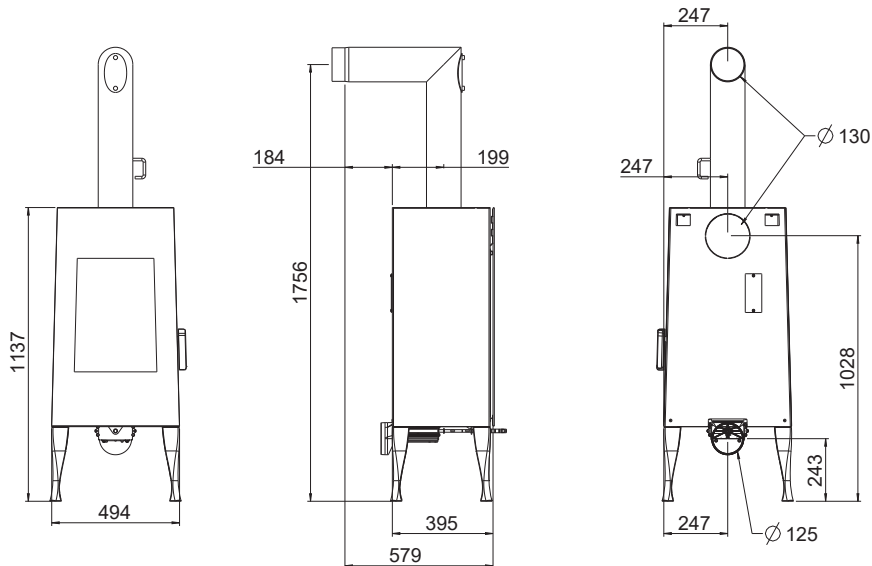

Weight

Weight with steelshell	[kg]	~115
------------------------	------	------

[kg] ~115

Dimensions

Height	[mm]	1137
Width	[mm]	494
Corpus depth	[mm]	395
Firing chamber [WxHxD]	[mm]	350x380x270

Flue pipe connection

Flue pipe outlet	[mm]	130
Original angle pipe connection height	[mm]	1756
Original angle pipe total depth	[mm]	579
Original angle pipe distance to rear wall	[mm]	184
Depth from rear wall to middle of flue pipe	[mm]	199
Original angle pipe side distance	[mm]	247
Rear connection height	[mm]	1028
Rear connection side distance	[mm]	247

Fresh air connection

Diameter	[mm]	125
Connection height	[mm]	243
Side distance	[mm]	247

33

Note

1. To non-combustible objects
 $a > 40 \text{ cm}$ $b > 10 \text{ cm}$
2. To combustible objects and reinforced concrete load-bearing walls
 $a > 80 \text{ cm}$ $b > 10 \text{ cm}$

